

## ULTRATRIM™ WIDE OUTSIDE 90

### CONSTRUCTION

- High strength tapered co-polymer core
- Preformed, uniform, 90 degree angle
- Surface: Tight fibered, formulated paperboard
- Back: Joint tape paper for uniform surface bonding

### DURABILITY

- Uniform structural bonding with corner prevents cracks and callbacks
- Corners will not dent
- Will not separate from wall
- Will withstand significant shifting due to settling, lumber drying,
- Withstands temperature and humidity variations

### AESTHETIC QUALITIES


- Perfect 90 degree angles every time
- Crisp, sharp lines
- Perfect surface for paint and textures
- Will withstand sanding without surface degradation
- Smoother finish

### PACKAGING

- Available in 8', 9', and 10' lengths
- 40 pieces per carton

### DIMENSIONS

- Co-polymer center thickness approximately .065"
- Co-polymer edge thickness approximately .024"
- Total Flange width = 2.25"
- Co-polymer flange width = 1.68"
- Paperboard edge flap = .57"

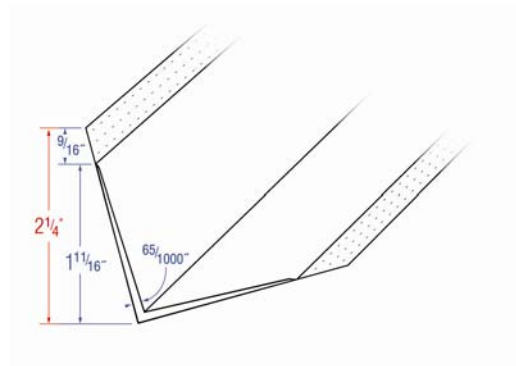

Job Name:
Contractor:
Date: